


# **Suspended Scales**

Mechanical



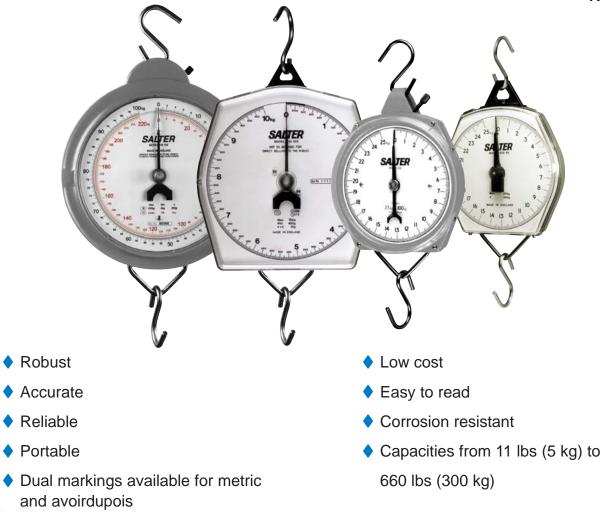

**Suspended Scales** 

### Model 235 6S

SALTER Brecknell


Compact, robust and corrosion resistant, housed in a tough ABS plastic case with shatterproof polycarbonate dial cover. Low friction acetal bearings provide positive movement to give maximum sensitivity. Accurate to one part in 250 with up to 15% zero adjust. Supplied with top and bottom hooks.


#### Option

Round pan Galvanized scoop

#### **Dual Marked**

5 kg x 20 g	/	11 lb x 1 oz
10 kg x 50 g	/	22 lb x 2 oz
25 kg x 100 g	/	56 lb x 4 oz
50 kg x 200 g	/	110 lb x 8 oz
100 kg x 500 g	/	220 lb x 1 lb

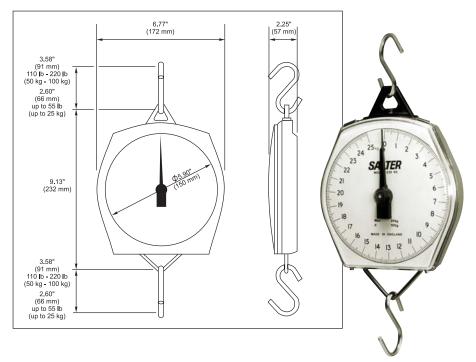

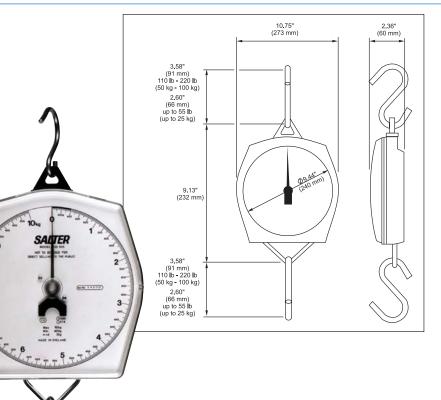

#### Model 235 10S

Robust and corrosion resistant, housed in a tough ABS plastic case with shatterproof polycarbonate dial cover. Low friction bearings provide positive movement to give maximum sensitivity. Accurate to one part in 500 with up to 15% zero adjust. Supplied with top and bottom hooks.

# Option

Round pan Galvanized scoop

#### **Dual Marked**

5 kg x 10 g	/	11 lb x 1/2 oz
10 kg x 20 g	/	22 lb x 1 oz
25 kg x 50 g	/	56 lb x 2 oz
50 kg x 100 g	/	110 lb x 4 oz
100 kg x 200 g	/	220 lb x 8 oz


# Mechanical

#### Model 235 6M

Compact, robust, housed in the traditional metal case. Accurate to one part in 250 with up to 15% zero adjustment. Supplied with top and bottom hooks.


#### Option

Round pan Galvanized scoop

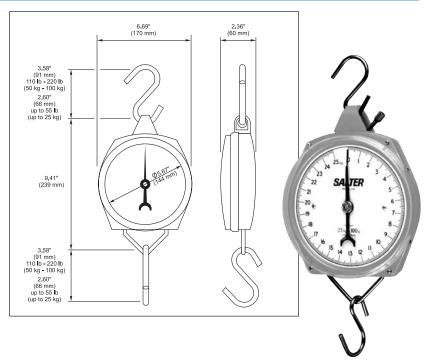

#### **Dual Marked**

/	11 lb x 1 oz
/	22 lb x 2 oz
/	56 lb x 4 oz
/	110 lb x 8 oz
/	220 lb x 1 lb

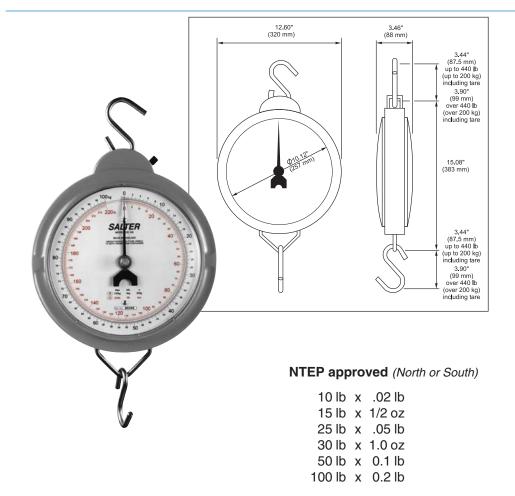

#### Model 235 10x (NTEP & Non-NTEP)

Heavy duty suspended scale, NTEP approved up to 100 lbs. Easy to read dial housed in a robust die cast casing. Low friction bearings provides positive movement to give maximum sensitivity. Accurate to one part in 500. Supplied with top and bottom hooks as standard.

## Option

Double lipped scoop Round pan Galvanized scoop

#### **Non-NTEP** approved

100 kg x 200 g	/	220 lb x 8 oz
200 kg x 500 g	/	440 lb x 1 lb
300 kg x 1 kg	/	660 lb x 2 lb



Galvanized scoop (16½" x 14" x 6" deep)

Can be supplied with 235-10X or 235-10S, up to 56 lb/25 kg capacity.



## Double lipped stainless steel scoop

Can be supplied with 235-10X or 235-10S.

# Round stainless steel pan, 12 in (305 mm diameter)

Can be supplied for retrofitting to the 235-6S, 235-6M, 235-10S, 235-10X, up to 56/25 kg capacity



