


# PD-II

## ECR Interface Scale

**First, choose the right ECR for you,  
because we have PD-II available for you**

*PD-II is equipped with RS-232C port and 4Bit Parallel for most popular ECRs such as SAMSUNG, SANYO, CASIO, SHARP and others Installation is very easy.*

*PD-II has standard large tray making weighing of large object convenient and accurate. The stainless tray of PD-II makes it sanitary weighing. Also PD-II is constructed low profile to make it easier to place an object on the tray.*

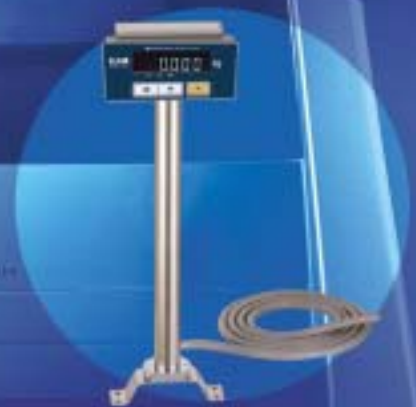

Pole Type



# PD-II

## ECR Interface Scale

### Display

One display comes standard and it is possible to install another display on the side.

Also the remote pole type display is available for PD-II as an option.

The display on the side can tilt it self making it easier to read.


### Communication Ports

- RS 232C
- 4 Bit Parallel (ECR interface)

### Options

- Dual Display (Side)
- Remote Pole Type Display

### Dimensions

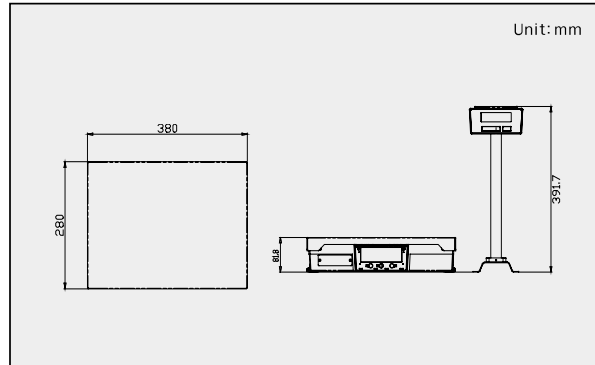

### Tilttable Display



### Specifications

| MODEL               |              | PD-II-6 kg  | PD-II-15 kg         | PD-II-30 kg          | PD-II-60 kg           |
|---------------------|--------------|---|---------------------|----------------------|-----------------------|
| Division            | Single Range | 2 g   | 5g                  | 10g                  | 20g                   |
|                     | Dual Range   | 3kg/1g<br>6kg/2g                                      | 6 kg/2g<br>15kg/ 5g | 15kg/5g<br>30kg/ 10g | 30kg/10g<br>60kg/ 20g |
| Interval Resolution |              | 1/90,000  |                     |                      |                       |
| External Resolution |              | 1/ 3,000 Single or Dual                               |                     |                      |                       |
| Display             |              | VFD 6 Digits  |                     |                      |                       |
| Display Lamps       |              | ST(STABLE), ZERO, NET                                 |                     |                      |                       |
| Power Supply        |              | AC 110V / 60Hz, AC 220V / 50Hz                        |                     |                      |                       |
| Platter Size (mm)   |              | 380 (W) x 280 (D)                                     |                     |                      |                       |
| Product Size (mm)   |              | 380 (W) x 280 (D) x 79 (H)                            |                     |                      |                       |
| Product Weight (kg) |              | 6.7kg   |                     |                      |                       |
| Temperature (°C)    |              | -10 °C ~+ 40 °C                                       |                     |                      |                       |
| Interface           |              | RS-232C, 4 Bit Parallel Communication (ECR interface) |                     |                      |                       |



CAS BLDG., # 440-1, SUNGNAE -DONG,  
GANGDONG -GU, SEOUL, KOREA  
TEL : 82 - 2 - 2225 - 3500  
FAX : 82 - 2 - 475 - 4668  
<http://www.cas.co.kr>

Specifications are subject to change for improvement without prior notice.



Proudly Sold & Serviced By:  
Able Scale Co Pty Ltd  
Ph: 1300 731 360  
21 Green St Thomastown VIC. 3074

find us on the web: [www.ablescale.com.au](http://www.ablescale.com.au)